

1005P Commercial Pressure Gauge

Features

- PowerFlex™ movement provides superior resistance to shock, vibration and pulsation
- TrueZero™ reduces reading errors by using a “zero box” instead of conventional dial pins
- Panel Mount conversion kit to transform back connect gauge into a panel-mount gauge
- Corrosion resistance ABS case
- Bulk packaging

Typical Uses

- Pumps and compressors
- Filter regulators and water pumps
- Beverage dispensing systems
- Instrument and controls
- Medical equipment
- Automotive applications
- Fluid power equipment



1005P
1 1/2", 2", 2 1/2", 3 1/2" dial sizes



Specifications

Accuracy:	±3-2-3% of span (ASME B40.100 Grade B)
Sizes:	1 1/2", 2", 2 1/2", 3 1/2"
Ranges:	1 1/2": Vacuum to 1,000 psi 2", 2 1/2", 3 1/2": Vacuum, compound to 6,000 psi

Process Connection Location:	Lower, Back
------------------------------	-------------

Process Connection Size:	1/8 and 1/4 NPT (1 1/2" not available in 1/4 NPT)
--------------------------	---

Dial:	Black figures on white background, aluminum
-------	---

Pointer:	Black, aluminum (STD.)
----------	------------------------

Movement:	PowerFlex™ with polyester segment
-----------	-----------------------------------

Dampening options:	FlutterGuard™
--------------------	---------------

Approvals:	UL 404, High Pressure Gas (2"; 1,000-4,000 psi) UL 252A, Compressed Gas Regulator Accessories (2"; 30-300 psi)
------------	---

Wetted Components

Bourdon Tube	Process Connection	Restrictor
Bronze	Brass	0.013" orifice throttle plug in gauges 1,000 psi and above

Non-Wetted Components

Case	Window
Black ABS	Polycarbonate

Key Benefits

- Customizable for new applications
- Conversion kits available

Min/Max Temperature Limits

Version	Ambient	Process	Storage
1005P	-40 °F to 150 °F (-40 °C to 65 °C)	-40 °F to 150 °F (-40 °C to 65 °C)	-40 °F to 150 °F (-40 °C to 65 °C)

Contact Us

1.800.328.8258
 ashcroft.com

All specifications are subject to change without notice. All sales subject to standard terms and conditions. Ashcroft®, FlutterGuard™, PowerFlex™, TrueZero™, and Trust the Shield® are trademarks of Ashcroft Inc. The following non-Ashcroft trademarks are the property of their respective owners: Teflon™
 ©2026 Ashcroft Inc. 1005p_gauge_ds_RevC_26-May-26

1005P Commercial Pressure Gauge

Ordering Code	Example:	20	W	1005	P	H	02	L	XAP	400#
Dial Size										
15 - 1½"										
20 - 2"		20								
25 - 2½"										
35 - 3½"										
Movement type										
PowerFlex™			W							
Model										
1005				1005						
Case/Window Material										
P - ABS/Polycarbonate					P					
Process Connection Material										
H - Brass						H				
Process Connection Size										
01 - ⅛ NPT										
02 - ¼ NPT (not available in 1½")							02			
KJ - ¼ straight BSPT; PT ¼ JIS										
KA - ¼ tapered BSPT; PT ¼ JIS										
KG - ⅛ BSPT; R ⅛										
13 - G ¼ B										
77 - G ⅛ no spigot										
Process Connection Location										
L - Lower								L		
B - Center back										
T - Top										
E - Left side										
D - Right side										
Options- Minimums apply for optional features(If choosing an options(s) must include "X")										X__
Dampening										
NZ or NZ7F - Silicone Free FlutterGuard(Includes throttle plug)										
SF - FlutterGuard™ (includes 0.013" orifice throttle plug)										
T4 - 0.007" orifice restrictor										
T5 - 0.013" orifice restrictor(0.013" orifice restrictor standard in ranges 1,000-6,000 psi)										
T7 - 0.020" orifice restrictor										
T9 - 0.063" orifice restrictor										
7F - FlutterGuard™ logo (can only be used in conjunction with XSF/XNZ – FlutterGuard™)										
Socket										
NP - Nickel plated socket										
Case/Ring										
VH - Vent hole in case										
UC - Panel mounting sleeve										
Window/Pointers										
AP - Adjustable pointer									AP	
EP - Min/max pointer										
Bourdon Tube System Assemblies										
PR - Receiver gauge dial code; 12#-ALK (0-100 linear); 12#-ALL (0/100%); 12#APR (0-10sq. root)										

1005P Commercial Pressure Gauge

Ordering Code (continued)	Example:	20	W	1005	P	H	02	L	XAP	400#
Marking/Tagging										
M1 - Dial marking "Supply"										
M2 - Dial Marking "Output"										
M3 - Dial marking "Instrument"										
T6 - Dial Marking "Transmit"										
Packaging/Labeling										
ZO - Bulk pack										
ZP - Customer part number on carton/plain white label										
ZQ - Customer part number printed directly on carton										
Testing/Certificates										
RS - RoHS (EN directives 2011/65/EN and 2015/863)										
RU - UL252A listed. (only available in ranges, 30-300 psi)										
UL - UL404 listed. (only available in ranges 1,000-4,000 psi)										
Ranges (coding example see range table on page 4 for all standard ranges)										
Single Scale										
400# - 400 psi										400#

Note: Black protective boot (must be ordered separately - not part of product code)

471B181-01	(1.5")
471B181-02	(2")
471B181-03	(2.5")
471B181-04	(3")

1005P Commercial Pressure Gauge

Table 2 - Ranges

Model	1005P											
Dial Size	1½"	2"	2"	2"	2½"	2½"	2½"	3½"	3½"	3½"	3½"	
Case	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	ABS	
Conn. Size	⅛	⅛	¼	¼	⅛	⅛	¼	⅛	⅛	¼	¼	
Conn. Type	Lower/ Back	Lower/ Back	Lower	Back	Lower	Back	Lower/ Back	Lower	Back	Lower	Back	

psi	CODE	bar	CODE	AVAILABILITY											
30IMV/0	VAC	-1/0	VAC-ABE	•	•	•	•	•	•	•	•	•	•	•	•
30IMV/15	15#&VAC	-1/0/1.5	15/V-AAA		•	•	•	•	•	•		•	•	•	•
30IMV/30	30#&VAC					•	•	•	•	•		•	•	•	•
30IMV/60	60#&VAC	-1/0/3	60/V-AAU			•	•	•	•	•		•	•	•	•
30IMV/100	100#&VAC	-1/0/5	100/V-AAW		•	•	•	•	•	•		•	•	•	•
30IMV/160	160#&VAC		160/V-AAY			•	•	•	•	•		•	•	•	•
30IMV/300	300#&VAC		300/V-ABB			•	•	•	•	•		•	•	•	•
0/15	15#	0/1	15#-AAA	•	•	•	•	•	•	•	•	•	•	•	•
		0/1.6	20#-AAB	•	•	•	•	•	•	•	•	•	•	•	•
0/30	30#	0/2.5	30#-AAD	•	•	•	•	•	•	•	•	•	•	•	•
0/60	60#	0/4	60#-AAF	•	•	•	•	•	•	•	•	•	•	•	•
0/100	100#	0/6	100#-AAG	•	•	•	•	•	•	•	•	•	•	•	•
		0/7	100#-AAH	•	•	•	•	•	•	•	•	•	•	•	•
0/160	160#	0/10	160#-AAI	•	•	•	•	•	•	•	•	•	•	•	•
0/200	200#	0/16	200#-AAL	•	•	•	•	•	•	•	•	•	•	•	•
0/300	300#			•	•	•	•	•	•	•	•	•	•	•	•
0/400	400#	0/25	300#-AAN	•	•	•	•	•	•	•	•	•	•	•	•
0/600	600#	0/40	600#-AAP	•	•	•	•	•	•	•	•	•	•	•	•
0/1000	1000#	0/60	1000#-AMK	•		•	•	•	•	•		•	•	•	•
0/1500	1500#	0/100	1500#-AMM			•	•	•	•	•		•	•	•	•
0/2000	2000#	0/160	2000#-AMO			•	•	•	•	•		•	•	•	•
0/3000	3000#					•	•	•	•	•		•	•	•	•
0/4000	4000#	0/250	4000#-AMQ			•	•	•	•	•		•	•	•	•
0/5000	5000#					•	•	•	•	•		•	•	•	•
0/6000	6000#	0/400	6000#-AUE			•	•	•	•	•		•	•	•	•
kPa	CODE	kg/cm²	CODE	AVAILABILITY											
-100/0	VAC-AGF	76cmHG/0	VAC-ADP	•	•	•	•	•	•	•	•	•	•	•	•
		76cmHG/0/1	15/V-ADB		•	•	•	•	•	•		•	•	•	•
-100/0/150	30/V-AFT	76cmHG/0/2	30/V-ADD			•	•	•	•	•		•	•	•	•
-100/0/300	60/V-AFV	76cmHG/0/3	60/V-BEI			•	•	•	•	•		•	•	•	•
		76cmHG/0/4	60/V-ALQ			•	•	•	•	•		•	•	•	•
-100/0/500	100/V-AFX	76cmHG/0/6	100/V-BEJ		•	•	•	•	•	•		•	•	•	•
-100/0/900	160/V-AFZ	76cmHG/0/6	160/V-ADI			•	•	•	•	•		•	•	•	•
		76cmHG/0/20	300/V-BEL			•	•	•	•	•		•	•	•	•
0/100	15#-AFB	0/1	15#-ACK	•	•	•	•	•	•	•	•	•	•	•	•
0/160	20#-AFC			•	•	•	•	•	•	•	•	•	•	•	•
0/200	30#-AFD	0/2	30#-ACM	•	•	•	•	•	•	•	•	•	•	•	•
0/250	30#-AFE	0/3	45#-ACO	•	•	•	•	•	•	•	•	•	•	•	•
0/400	60#-AFG	0/4	60#-ACP	•	•	•	•	•	•	•	•	•	•	•	•
0/600	100#-AFH	0/6	100#-ACQ	•	•	•	•	•	•	•	•	•	•	•	•
0/800	120#-BAT			•	•	•	•	•	•	•	•	•	•	•	•
0/1000	160#-AFJ	0/10	160#-ACS	•	•	•	•	•	•	•	•	•	•	•	•
0/1600	200#-AFM	0/15	200#-BEA	•	•	•	•	•	•	•	•	•	•	•	•
		0/20	300#-BEB	•	•	•	•	•	•	•	•	•	•	•	•
0/2500	400#-AFO	0/25	400#-ACX	•	•	•	•	•	•	•	•	•	•	•	•
0/4000	600#-AFQ	0/35	600#-BEC	•	•	•	•	•	•	•	•	•	•	•	•
		0/40	600#-ACZ	•	•	•	•	•	•	•	•	•	•	•	•
		0/50	600#-BED	•	•	•	•	•	•	•	•	•	•	•	•
0/6000	1000#-BAU	0/70	1000#-ANB	•		•	•	•	•	•		•	•	•	•
0/8000	1000#-BAV			•		•	•	•	•	•		•	•	•	•
0/10000	1500#-ATK	0/100	1500#-ANC			•	•	•	•	•		•	•	•	•
0/16000	2000#-BAW	0/150	2000#-BEE			•	•	•	•	•		•	•	•	•
0/25000	4000#-BAX	0/250	4000#-ANG			•	•	•	•	•		•	•	•	•
		0/350	5000#-BEF			•	•	•	•	•		•	•	•	•
0/40000	6000#-ATU	0/500	6000#-BEG			•	•	•	•	•		•	•	•	•

For Dual Scale Ranges Consult Factory

Contact Us

1.800.328.8258

ashcroft.com


All specifications are subject to change without notice. All sales subject to standard terms and conditions.
 Ashcroft®, FlutterGuard™, PowerFlex™, TrueZero™, and Trust the Shield® are trademarks of Ashcroft Inc.
 The following non-Ashcroft trademarks are the property of their respective owners: Teflon™
 ©2026 Ashcroft Inc. 1005p_gauge_ds_RevC_26-May-26

1005P Commercial Pressure Gauge


Dimensions

For reference only, consult Ashcroft for specific dimensional drawings

Lower and Back Connections															
Dial Size inches [mm]	A		B		C	F NPT	F ₁ NPT	G	H	K	M	W		Weight oz / kg	
	Lower	Back	Lower	Back								Lower	Back	Lower	Back
1½"	1.66 [42]	1.64 [42]	1.07 [27]	1.01 [26]	1.6 [41]	⅛	⅛	1.41 [36]	0.38 [10]	0.62 [17]	0.62 [16]	0.56 [14]	0.44 [11]	1.62 oz 0.068 kg	1.55 oz 0.044 kg
2"	2.11 [54]	2.11 [54]	1.07 [27]	1.05 [27]	2.05 [52]	⅛ or ¼	⅛ or ¼	1.85 [47]	0.38 [10]	0.85 [22]	0.82 [21]	0.56 [14]	0.56 [14]	2.40 oz 0.068	2.75 oz 0.078 kg
2½"	2.74 [70]	2.74 [70]	1.12 [28]	1.14 [29]	2.67 [68]	⅛ or ¼	⅛ or ¼	2.18 [55]	0.38 [10]	0.78 [20]	0.83 [21]	0.56 [14]	0.56 [14]	2.89 oz 0.082 kg	3.17 oz 0.090 kg
3½"	3.70 [94]	3.70 [94]	1.14 [29]	1.28 [32]	3.62 [92]	⅛ or ¼	⅛ or ¼	2.72 [69]	0.43 [11]	0.72 [18]	0.92 [23]	0.56 [14]	0.56 [14]	5.36 oz 0.152 kg	4.37 oz 0.124 kg

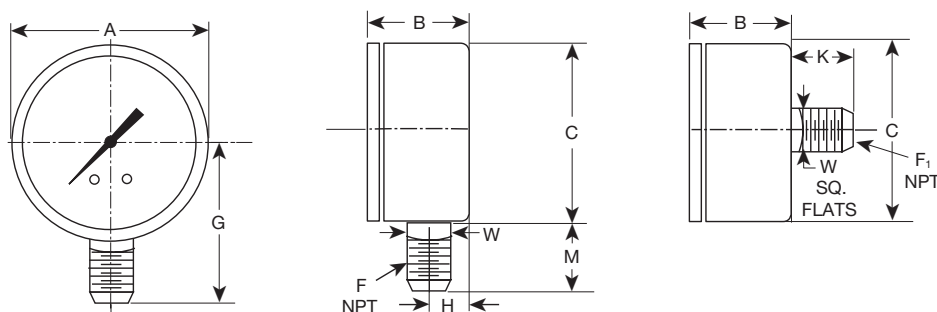

ABS Case Panel Mount Sleeve										
Inches [mm]	A	B	C	D	E	F	G	H	J	Conn. NPT
1½"	2.05 [52]	1.04 [27]	1.75 [45]	1.85 [47]	0.13 [3]	0.60 [14]	1.19 [30]	0.68 [18]	7/16 sq. [11]	⅛
2"	2.52 [64]	1.04 [27]	2.23 [57]	1.89 [48]	0.17 [4]	0.82 [21]	1.63 [41]	0.68 [18]	9/16 sq. [14]	⅛ or ¼
2½"	3.17 [81]	1.13 [29]	2.84 [72]	1.98 [50]	0.17 [4]	1.13 [29]	2.26 [57]	0.68 [18]	9/16 sq. [14]	⅛ or ¼
3½"	4.08 [104]	1.23 [31]	3.80 [96]	2.11 [54]	0.20 [5]	1.61 [41]	3.22 [82]	0.68 [18]	9/16 sq. [14]	⅛ or ¼

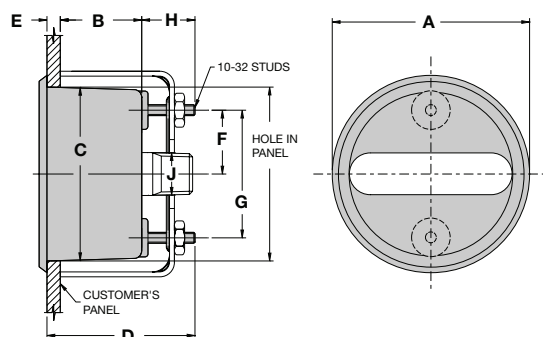

Panel Cut Out		
Inches [mm]	Min.	Max.
1½"	1.850 [47]	1.968 [50]
2"	2.330 [59]	2.440 [62]
2½"	2.920 [74]	3.075 [78]
3½"	3.898 [99]	4.016 [102]